

Three-axle rear tipper semitrailer design: steel body with chute and platform



S.KI 24

Model: S.KI 7.2 SL 06 SR


Technical specifications

Semitrailer height loaded – min. recommended	1,190 mm
Semitrailer height loaded - Semitrailer horizontal.	1,170 mm
Semitrailer height loaded max. permissible	1,270 mm
Semitrailer height empty & coupled - Semitrailer horiz.	1,200 mm
Semitrailer height empty & coupled - max. permissible	1,300 mm
<hr/>	
Front overhang radius (front beam)	1,385 - 1,410 mm
Front overhang radius with platform	1,635 mm
Pivoting radius as per ISO 1726	2,300 mm
<hr/>	
Tyres for driving height = 470 (overall height)	385 / 65 R 22,5"
Tyres for driving height = 470 (overall height + 30 mm)	425 / 65 R 22,5"
<hr/>	
Axle spread	1,210/1,310 mm
Wheelbase	4,900/4,800 mm
Rear overhang chute	2,615/2,715 mm
Rear overhang supported hinged tailgate	2,590/2,690 mm
Rear overhang combi-door vertical	2,675/2,775 mm
<hr/>	
Middle of heating funnel to King Pin	150 mm
Middle of heating funnel to middle of longitudinal axis	1,065 mm
<hr/>	
Body height	1,660/1,460 mm
Overall height	3,125/2,925 mm
Overall height with roller tarpaulin (+ 100 mm)	3,235/3,035 mm
Overall height with sliding tarpaulin (+ 400 mm)	3,525/3,325 mm
Loading length with chute	7,300 mm
Loading length with supported hinged tailgate	7,480 mm
Loading length with combi-door vertical	7,675/7,645 mm


Fittings

Front overhang of '600' canopy	1,205/1,145 mm
Front overhang without platform	855 mm
Front overhang with platform	1,360 mm
Overall length with chute (with platform)	8,875 mm
Overall length with combi-door vertical (with platform)	8,935 mm
Ov. length with supported hinged tailgate (with platform)	8,850 mm
Overall length with chute (without platform)	8,370 mm
Ov. length with combi-door vertical (without platform)	8,430 mm
Ov. length with supp. hinged tailgate (without platform)	8,345 mm
Overall length with chute (with '600' canopy)	8,720/8,660 mm
Ov. length with combi-door vertical (with '600' canopy)	8,780/8,720 mm
Ov. length with supp. hinged tailgate (with '600' canopy)	8,695/8,635 mm

Combi-door vertical

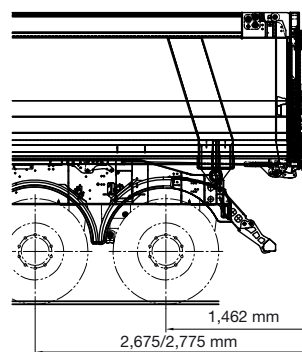

Supported hinged tailgate

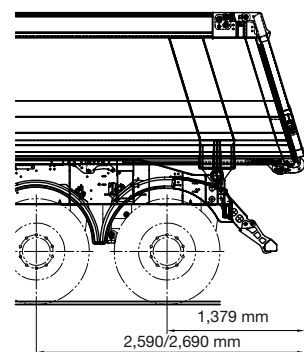

*Additional fittings

All dimensions and weights are approximate. The data relate to a vehicle with base fittings without taking into consideration possible additional fittings. Issued: 13.04.2007

Trailer

Services

Technology

just more.