


**SCHMITZ
CARGOBULL** 
The Trailer Company.

S.CS 24/L – 13.4 CEB

Fittings for optimal transportation



Securing hold – The 10 pairs of heavy duty lashing rings rated at 4 tonnes breaking strength easily and reliably secure even heavy coils.

Robust on the road – The chassis with spray resistant coil body has been constructed for max. load of 30t at 1.5m.



Transport flexibly – The core of the coil body can be closed with the 28 mm thick cover for transporting palletised goods.

Safe loading – The coils are held using a 4 pair coil combined support that can be used in the body and the outer frame.

Technical specifications

Fittings	Cargobull pneumatic suspension with lifting and lowering system
Chassis front	128 mm including plywood floor
Axles	3 x 9,000 kg
Track / Spring centre	2,040 mm / 1,300 mm
Disc brakes	Ø 430 mm
Single wheel	385 / 65 R 22.5"
Total weight	up to 39,000 kg
Unladen weight*	6,995 kg
Vehicle – overall length	13,720 mm
Vehicle – overall width	2,550 mm
Width between the stanchions	2,480 mm
Internal body length	13,620 mm
Load through length at side	13,090 mm
Internal rear door width	2,480 mm
Internal body height	2,780 mm
Load through height at side	2,700 mm
Fifth-wheel height, loaded**	1,050 mm
Rear loading height, loaded	1,178 mm
Overall height, loaded, approx.	4,000 mm

* Net weight (+/- 3%) without refrigerator and additional fittings.

** Other body heights are possible at different fifth-wheel heights.

Issued: 27/08/08



*at 1.5m

Curtainsider Semitrailer S.CS COIL

30 tonnes of lumped load*
**30 good reasons when it starts
to get heavy**

just more.

Trailer

Services

Technology

**SCHMITZ
CARGOBULL** 

Schmitz Cargobull AG · Bahnhofstraße 22 · D-48612 Horstmar
Phone +49 2558 81-0 · Fax +49 2558 81-500
E-mail: info@cargobull.com · www.cargobull.com

S.CS-COIL-FLY-DEGB-1790-3708 Some illustrations with special fittings - We retain the right to make changes for technical development.



All-rounder for transporting steel

The Schmitz Cargobull Curtainsider semitrailer S.CS COIL fulfils your requirements and those of your branch – reliably, even under hard conditions.

- Safe transport for all common steel coils: The special fully galvanised coil body provides a secure hold in the lengths of 7,200 or 9,000mm with a diameter of 800 to 2,200mm. The construction allows a load of 30 tonnes within 1.5m of the load centre.
- Efficient transportation due to an especially high payload: Due to the special arrangement of the axle, the axle-unit can carry up to 27 t. For this purpose, the total weight of standard tractor units – the certificate of exemption for indivisible loads makes this possible – reaches a total weight up to 45t.
- Variable: With the coil body cover, you can transport palletised goods or grid boxes on a level floor.
- Robust: The cover can be localized with a load of up to 5.46t.
- Suitable for intermodal transport: The S.CS COIL intermodal is the crane loadable version for rail traffic.
- Simple and fast loading: Through the form fit loading with load securing beams according to EN 12642 Code XL




Top class technology for safe applications

Body – Innovative equipment features ensure more comfort and a trouble free working sequence.

- Screw-out corner stanchions for a through loading width up to 3,350 mm allow the loading of e. g. extra wide plates.
- Increase in volume with the MEGA version. With its full 3m internal height for 100m³ volume, this version is ideal for automotive logistics.

Chassis – Solid base for the body.

- Being hot-dip galvanized and bolted, retains its value and provides the best possible protection against rust.

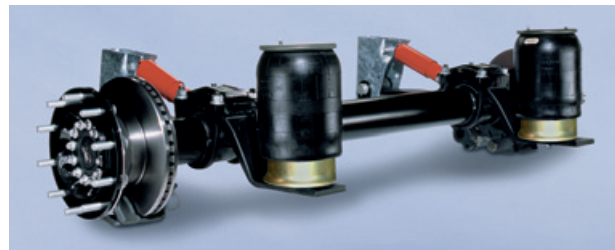

ROTOS® running gear



MEGA version for extra high requirements

Large, larger, S.CS COIL in the MEGA version: This also allows you to handle extreme demands.

- Versatile operational possibilities: The MEGA version is fitted with an adjustable body for adapting to different coupling heights as well as special MEGA tyres. This allows you to transport different types of return goods and therefore avoids empty runs.
- More capacity: With its 3m internal height, the MEGA version e. g. can also be operated in automotive logistics.
- Combined transportation: With the MEGA version, you are also able to combine the transportation of coils, combined loading traffic and volume transportation with each other.

ROTOS® running gear – Long-life Schmitz Cargobull Technology with 1,000,000 km* guarantee.

- Robust High-Tech components that are optimally matched to each other: Electronic braking system (EBS), Roll Stability Program (RSP), Schmitz Cargobull axle, MRH pneumatic suspension and Lift unit.

*or 6 years; except for parts subject to wear